



Purchasing Department  
 840 West 11<sup>th</sup> Street, Suite 2500  
 Panama City, FL 32401  
 Telephone: (850) 248-8270  
 Fax: (850) 248-8276

**BOARD OF COUNTY COMMISSIONERS**

WWW.BAYCOUNTYFL.GOV

April 26, 2019

Prospective Respondents

**RE: Addendum #9 RFP 19-33 Steelfield Road Landfill Expansion Project Design Build Team**

Please accept this as Addendum No. 9 for the above referenced solicitation.

The following questions have been received. The County's answers follow in **Bold**.

840 WEST 11<sup>TH</sup> STREET  
 PANAMA CITY, FL 32401

COMMISSIONERS:

TOMMY HAMM  
 DISTRICT I


ROBERT CARROLL  
 DISTRICT II

WILLIAM T. DOZIER  
 DISTRICT III

KEITH BAKER  
 DISTRICT IV

PHILIP "GRIFF" GRIFFITTS  
 DISTRICT V

ROBERT J. MAJKA JR.  
 COUNTY MANAGER

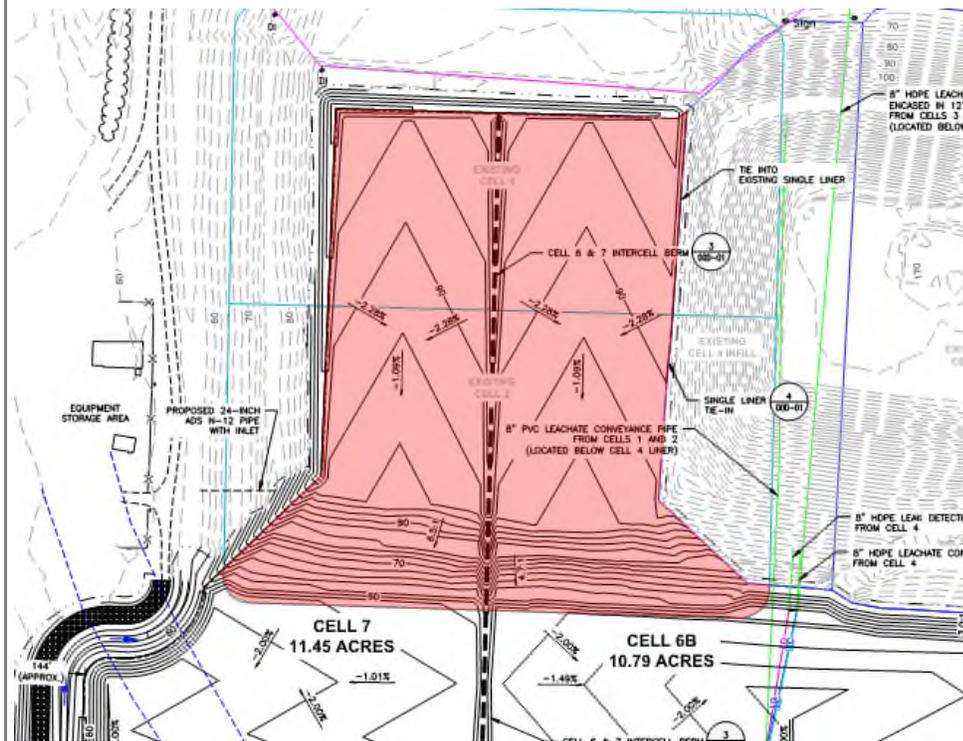

**Addendum #4  
 Sheet 00D-01  
 Detail 1**

A minimum of 2-foot structural fill thickness is required below the geosynthetic liner components within the limits of Cells 1 and 2 vertical expansion. A minimum 1-foot thickness shown in the drawing set issued with Addendum #2 is a typo.

In addition specification Section 02300 Part 3.4 F, items 3 and 4 should be revised to maintain minimum 2-foot soil cover below the liner.

Based on the question and answer from Addenda #4 about Area 1 and 2:

1. Is the shaded area above the limits of the ASH? **Yes**
2. Within this area, are we to grade to the elevations shown on the subgrade plan? **00C-03 illustrates top of liner grading plan. DBT to excavate and remove MSW at least 2-feet below these grades and replace with 2-feet of clean soil.**
3. If we are to grade to the subgrade, where does the excavated ash need to be relocated too prior to replacing the 2 foot cover soil? Is that the intent or do we just shape accordingly then verify there is a 2 foot cover prior to installing liner? **Refer to the response to Question 32 of Addendum 6.**

All respondents shall acknowledge receipt of this addendum by signing and submitting, with their submittal, the addendum acknowledgement form included in the RFP package.

Sincerely,

Karen Grindle  
Contract Administrator